LEDURE

Beyond Innovation

Lights Change Toh Vibe Change





Architectural Luminaires Catalogue

w.e.f. 1st April 2026

LEDURE

Beyond Innovation



Ledure Lights Illuminate with Style & Reliability

At **LEDURE**, Everyday is a step towards a brighter, more sustainable future.

Welcome to the world of Ledure, where innovation meets elegance and efficiency. Discover our vast selection of stylish, energy efficient LED lights, crafted for both indoor and outdoor environments.

Each **LEDURE** product reflects our unwavering commitment to excellence. Years of dedicated research and innovation have resulted in LED lights that are as visually stunning as they are high-performing. Our products, designed by internationally trained experts and rigorously tested, are built to last & impress.

The Heart of Quality

A Glimpse Into our Manufacturing Facility



Manufacturing Unit



SMT Machine



Testing Facility



Driver Section



Reflow Oven



Laser Cutting



Assembly Line



Warehouse

Elevating Spaces, Inspiring Designs

Ledure Architectural Luminaires redefine illumination - blending form, function, and precision engineering to accentuate architectural features and elevate any space. At Ledure Lightings Limited, we transform architectural visions into radiant realities.

Our diverse portfolio of state-of-the-art fixtures seamlessly complements every architectural style, delivering both aesthetic appeal and practical performance. Experience cutting-edge technology and sophisticated design, all in one complete luminaire solution.

Ensuring Standards

Ledure's Commitment to Quality

RoHS compliant · CE · MSME · NABL · NSIC · Bureau of Indian Standards · ISO 9001:2015

Our Clients

Excellence Defined by the People we Serve

HP · ONGC · IndianOil · GAIL · Bharat Petroleum · Oil India Limited · SAIL · NTPC · DRDO · Airports Authority of India · NALCO · HAL · ISRO · BHEL · Coal India · NPCIL · St. Regis Hotels & Resorts · Bain & Company · Mohanlal Sons · OYO · Huawei · BCG · Samsung · Castrol · HDB Financial Services · Canara Bank · AMU · DelTech

and many more.

Driven By Quality

Our Trusted Partnerships

bridgelux · CITIZEN.

LEDURE

TABLE OF CONTENTS

Page No.	Nexa Magnetic Tracks & Accessories
01 - 02	Nexa Magnetic Track Light Series
03 - 04	Nexa Magnetic Track Range
05 - 06	26mm Magnetic Track System & Lights Module
07	10mm Magnetic Track System & Lights Module
08	5mm Magnetic Track System & Lights Module
	Smartify Series
09 - 10	Smartify Series - Introduction
11 - 12	Smartify Raylight Downlight Series
13 - 14	Smartify Air COB Series
	Smart Series
15 - 16	Smart Series - Introduction
17 - 18	Smart Grace COB Series
19 - 20	Smart Air COB Series
21 - 22	Smart Air Downlight Series
	Linear Series
23 - 24	Aero Linear Light Series
	COB Striplight Series
25	COB Striplight Series
26	SMPS Driver Series

LEDURE

ARCHITECTURAL
Luminaires

Page No.	Recessed Lights
27 - 30	Arcade COB Series
31 - 32	Jade COB Series
33 - 34	Divine COB Series
35 - 38	Saga COB Series
39 - 40	Olive COB Series
41 - 42	Boost COB Series
43 - 44	Dynamo COB Series
45 - 46	Casa COB Series
47 - 48	Zoom Plus COB Series
49 - 50	Divine Spot COB Series
51 - 52	Lazer Line Downlight Series
53 - 54	Saga Downlight Series

	Surface Lights
55 - 56	Cube Surface COB Series
57 - 58	Divine Surface Spot COB Series
59 - 60	Casa Surface COB Series
61 - 62	Divine Surface COB Series
63 - 64	Olive Surface COB Series



LEDURE

Nexa Magnetic

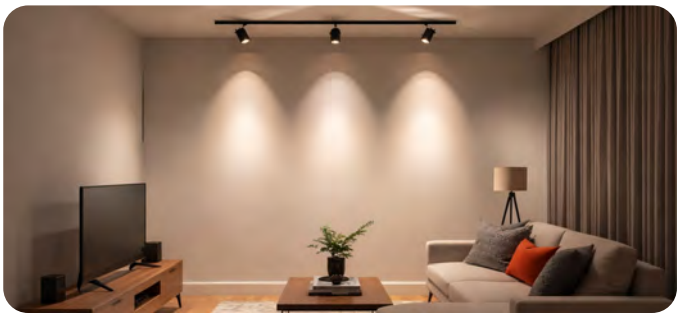
TRACK LIGHT SERIES

Illuminate Flexibility with Magnetic Precision



Applications

Designed to Fit Every Space



Homes & Residences

Create warm, layered lighting that enhances comfort and elevates everyday living spaces.



Cafes & Restaurants

Set the perfect ambience with adjustable lighting that complements mood, time, and experience.



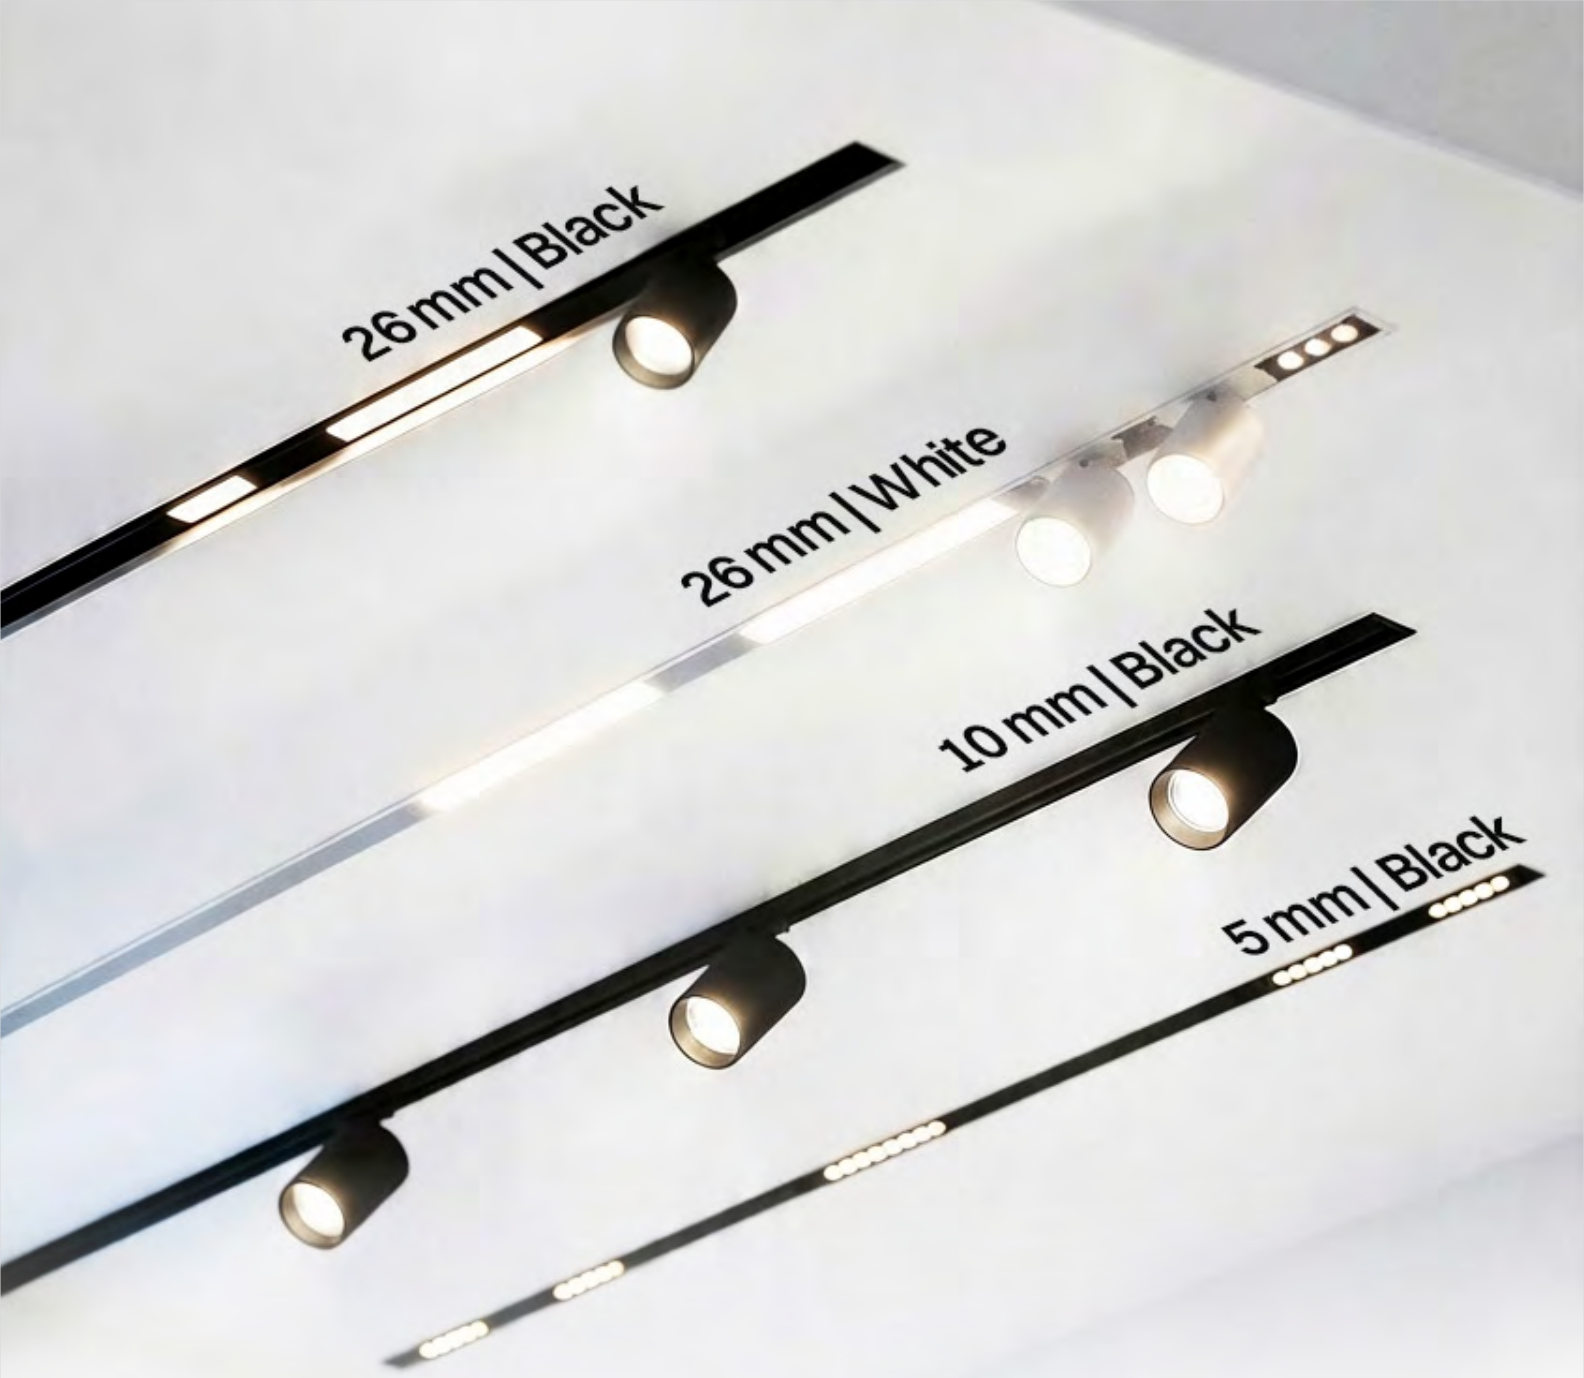
Retail & Showrooms

Highlight products with precise lighting that draws attention and enhances visual merchandising.



Commercial Spaces

Deliver efficient, adaptable lighting solutions designed for productivity and modern work environment.



LEDURE

Designed to Fit Every Space

Three sizes. Endless possibilities.

The Nexa Magnetic Track system is available in three distinct sizes 5mm, 10mm, and 26mm each designed to suit different spatial and aesthetic requirements. From ultra-slim, minimal profiles to more robust architectural tracks, the system offers flexibility across applications. Available in classic black and white finishes (variant dependent), these tracks integrate seamlessly into both modern and contemporary interiors, ensuring a cohesive and refined lighting experience.

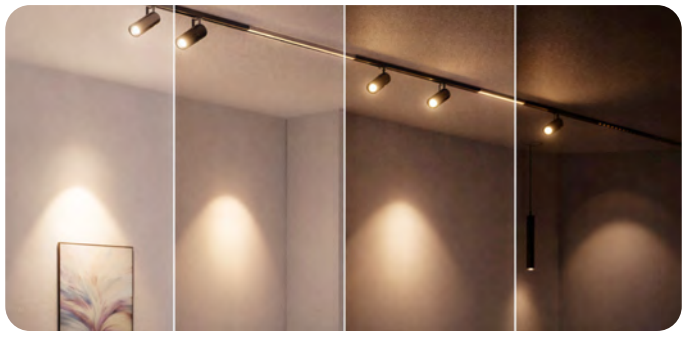


LEDURE

Control the Light, Your Way

Dimmable Effect

*This feature only works with dimmable lights



Dimmable Buttons

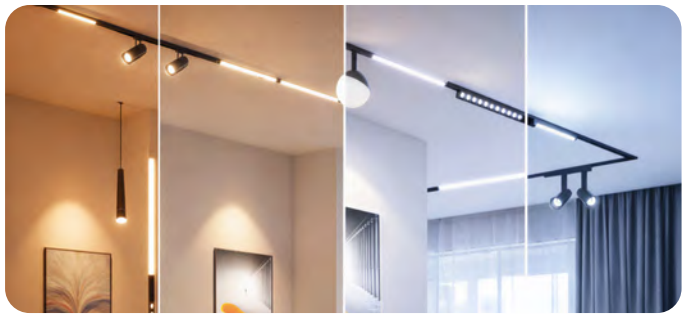
Select brightness ranging from 0% to 100% by using Dimmable Buttons

Brightness Control

Adjust brightness as per your liking by using the Brightness Control.

Tunable Control

*This feature only works with tunable lights



Tunable Buttons

Select default color temperature ranging from 3000k to 6500k

Color Control

Colors can also be adjusted as per your liking by using Color Control

Remote Control

Product Type	Remote Control
Colour	Black
Product Code	LDA-10-REMOTE
Dimension (mm)	42x14x142
RF- 2.4GHz Connectivity	AAA 1.5V Battery



Recessed Drivers





Product Type	Driver -100W	Driver -200W
Colour	Black	Black
Product Code	LDA-10-100WD	LDA-10-200WD
Dimension (mm)	210x26x24	310x26x24
Housing Material	PC	PC
Operating Voltage	2.1 Amp	4.2 Amp

LEDURE

26mm Magnetic Track System

High-performance lighting for large-scale applications

The 26mm lighting modules offer a versatile range of high-performance lighting modules designed for flexible layouts, delivering precise illumination with a clean architectural finish.



Slim Surface Track

A sleek, low-profile track designed for minimal interiors where subtlety is key.

Best for:

Modern homes, studios, and clean ceiling designs.

Product Size	1 Meter	2 Meter
Product Colour	Black, White	Black, White
Product Code	LDA-10-SSTC1M	LDA-10-SSTC2M
Dimension (mm)	1000x26x6	2000x26x6
Housing Material	Aluminium	Aluminium
Standard Packing	5 Units	5 Units

Jointers



Product Type	Straight Jointers	Corner Jointers
Colour	Black, White	Black, White
Product Code	LDA-10-SSTC1M	LDA-10-SSTCJ
Dimension (mm)	59x26x6	25x25x6
Housing Material	Aluminium	Aluminium



Surface Track

A bold, exposed track that becomes part of the design language while offering flexibility.

Best for:

Retail stores, galleries, and industrial-style spaces.

Product Size	1 Meter	2 Meter
Product Colour	Black	Black
Product Code	LDA-10-ST1M	LDA-10-SSTC2M
Dimension (mm)	1000x29x37	2000x29x37
Housing Material	Aluminium	Aluminium
Standard Packing	20 Unts	20 Unts

Jointers

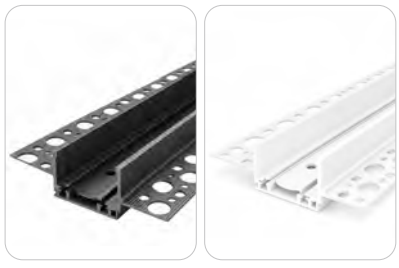


Product Type	Horizontal Jointers	Vertical Jointers
Colour	Black	Black
Product Code	LDA-10-STHJ	LDA-10-STVJ
Dimension (mm)	100x100x37	100x100x37
Housing Material	Aluminium	Aluminium

Surface Track Hanging Accessories



Product Type	Surface Track Hanging Bag
Product Code	LDA-10-STHB
Housing Material	Metal



Concealed Track

Integrated seamlessly into the ceiling for a clean, invisible lighting experience.

Best for:

Luxury interiors and high-end architectural projects.

Product Size	1 Meter	2 Meter
Product Colour	Black, White	Black, White
Product Code	LDA-10-CT1M	LDA-10-CT2M
Dimension (mm)	1000x67x31	2000x67x31
Housing Material	Aluminium	Aluminium
Standard Packing	2 Units	2 Units

Jointers



Product Type	Horizontal Jointers	Vertical Jointers
Colour	Black, White	Black, White
Product Code	LDA-10-CTHJ	LDA-10-CTVJ
Dimension (mm)	100x100x31	100x100x31
Housing Material	Aluminium	Aluminium



Product Type	Curve Connectors
Colour	Black
Product Code	LDA-10-CTCJ
Dimension (mm)	D100x31
Housing Material	Aluminium

Track Drivers

Power Units to ensure stable and efficient performance of the entire system.



Product Type	Driver -100W	Driver -200W
Colour	Black, White	Black, White
Product Code	LDA-10-100WD	LDA-10-200WD
Dimension (mm)	210x26x24	310x26x24
Housing Material	PC	PC
Operating Voltage	2.1 Amp	4.2 Amp

Conduction Module

Essential for extending tracks & maintaining continuous lighting across layouts



Product Type	Straight Conduction Module	Corner Conduction Module
Colour	Black, White	Black, White
Product Code	LDA-10-SCM	LDA-10-CCM
Dimension (mm)	147x26x16	295x26x16
Housing Material	PC	PC

Driver Cable Cover Box

Installed discreetly to maintain a clean aesthetic while delivering consistent power.

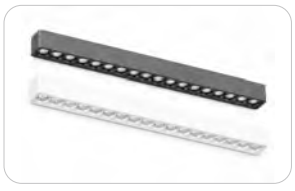
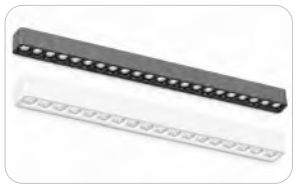


Product Type	Cable Cover Box
Product Colour	Black
Product Code	LDA-10-DCB
Housing Material	PC

LEDURE

26 mm Magnetic Track Lights Module

A range of modular light units for flexible and precise illumination

Lazer Light

Wattage	12W	18W
Product Colour	Black, White	Black, White
Product Code	LDA-10-12WLZ	LDA-10-18WLZ
Colour Temperature	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool
CRI	>90	>90
Beam Angle	24 Degree	24 Degree
Operating Voltage	48V DC	48V DC
Source Lumen (Lm/W)	140	140
Output Lumen (Lm)	780	1150
Dimension (mm)	230x26x24	338x26x24
Housing Material	Aluminium & PC	Aluminium & PC
Standard Packaging	50 Units	50 Units




Track Light

Wattage	10W	20W
Product Colour	Black, White	Black, White
Product Code	LDA-10-10WT	LDA-10-20WT
Colour Temperature	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool
CRI	>90	>90
Beam Angle	24 Degree	24 Degree
Operating Voltage	48V DC	48V DC
Source Lumen (Lm/W)	140	140
Output Lumen (Lm)	400	800
Dimension (mm)	47x120	57x135
Housing Material	Aluminium & PC	Aluminium & PC
Standard Packaging	20 Units	20 Units





Linear Light

Wattage	12W	18W	24W
Product Colour	Black, White	Black, White	Black
Product Code	LDA-10-12WLN	LDA-10-18WLN	LDA-10-24WLZ
Colour Temperature	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool
CRI	>80	>80	>80
Beam Angle	120 Degree	120 Degree	120 Degree
Operating Voltage	48V DC	48V DC	48V DC
Source Lumen (Lm/W)	140	140	140
Output Lumen (Lm)	550	860	1100
Dimension (mm)	230x26x24	338x26x24	445x26x24
Housing Material	Aluminium & PC	Aluminium & PC	Aluminium & PC
Standard Packaging	50 Units	50 Units	50 Units



Dual Track Light

Wattage	20W (10W+10W)
Product Colour	Black
Product Code	LDA-10-20WDT
Colour Temperature	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool
CRI	>90
Beam Angle	24 Degree
Operating Voltage	48V DC
Source Lumen (Lm/W)	140
Output Lumen (Lm)	800
Dimension (mm)	45x110x2
Housing Material	Aluminium & PC
Standard Packaging	20 Units







	Surface Spot Light	Spot Light	Pendant Spot Light	Pendant Soft Globe Light	Beam Light
Wattage	6W	6W	12W	6W	18W
Product Colour	Black	Black	Black	Black	Black
Product Code	LDA-10-6WSS	LDA-10-6WSL	LDA-10-12WPS	LDA-10-6WPG	LDA-10-18WBL
Colour Temperature	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool
CRI	>90	>90	>90	>90	>90
Beam Angle	24 Degree	24 Degree	24 Degree	360 Degree	180 Degree
Operating Voltage	48V DC	48V DC	48V DC	48V DC	48V DC
Source Lumen (Lm/W)	140	140	140	140	140
Output Lumen (Lm)	200	270	400	300	1400
Dimension (mm)	75x75	122x26x55	40x345	150x150	600x26
Housing Material	Aluminium	Aluminium & PC	Aluminium & PC	PC	Aluminium & PC
Standard Packaging	20 Units	40 Units	20 Units	20 Units	20 Units 600X26

LEDURE

10mm Magnetic Track System

Slim, versatile lighting for modern interiors

The 10mm magnetic track system strikes the perfect balance between minimal design and functional versatility. Its slim profile integrates effortlessly into modern interiors while supporting a wider range of lighting modules for both ambient and accent lighting. Designed for flexibility, the system allows easy customization of layouts, making it suitable for residential and commercial spaces that require both aesthetic clarity and performance.




Concealed Track

Designed for flush ceiling integration with a seamless finish

Product Size	1 Meter	2 Meter
Product Colour	Black	Black
Product Code	LDA-10-CT1M-10	LDA-10-CT2M-10
Dimension (mm)	1000x14x43	2000x14x43
Housing Material	Aluminium	Aluminium
Standard Packing	6 Units	6 Units

Jointers





Product Type	Horizontal Jointers	Ceiling to Ceiling Curve Jointer (S)
Colour	Black	Black
Product Code	LDA-10-CTHJ-10	LDA-10-CTCTCJ-10
Dimension (mm)	80x81x43	D600x43
Housing Material	Aluminium	Aluminium

Conduction Module





Product Type	Straight Conduction Module	Corner Conduction Module
Colour	Black	Black
Product Code	LDA-10-SCM-10	LDA-10-CCM-10
Dimension (mm)	217x20x11	342x20x11
Housing Material	PC	PC

10 mm Magnetic Track Lights Module

A range of modular light units for flexible and precise illumination



Product Type	Lazer Light		Linear Light		Track Light			Pendant Spot Light
Wattage	12W	18W	10W	15W	6W	12W	18W	7W
Product Colour	Black	Black	Black	Black	Black	Black	Black	Black
Product Code	LDA-10-12WLZ-10	LDA-10-12WLZ-10	LDA-10-10WLN-10	LDA-10-15WLN-10	LDA-10-6WT-10	LDA-10-12WT-10	LDA-10-18WT-10	LDA-10-7WPS-10
Colour Temperature	Tunable, Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable, Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable, Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable, Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable, Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable, Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable, Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable, Dimmable 2700K - 6500K Warm|Natural|Cool
CRI	>90	>90	>80	>80	>90	>90	>90	>90
Operating Voltage	48V DC	48V DC	48V DC	48V DC	48V DC	48V DC	48V DC	48V DC
Dimension (mm)	196x38x11	288x38x11	300x38x11	450x38x11	35x80	42x100	55x115	40x200
Housing Material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium & PC	Aluminium & PC	Aluminium & PC
Standard Packaging	50 Units	50 Units	50 Units	50 Units	40 Units	40 Units	20 Units	50 Units

LEDURE

5mm Magnetic Track System

Ultra-slim lighting for seamless architectural integration

The 5mm magnetic track system is designed for ultra-minimal applications where lighting blends seamlessly into the architecture. With its extremely slim profile, it allows for clean, almost invisible installations while maintaining precise and effective illumination. Ideal for refined interiors, the system offers a curated range of compact lighting modules and accessories that enable subtle yet impactful lighting design without visual clutter.



Concealed Track

Designed for flush ceiling integration with a seamless finish

Product Size	1 Meter	2 Meter
Product Colour	Black, White	Black, White
Product Code	LDA-10-CT1M-5	LDA-10-CT2M-5
Dimension (mm)	1000x11x21	2000x11x21
Housing Material	Aluminium	Aluminium
Standard Packing	10 Units	10 Units

Jointers





Product Type	Horizontal Jointers	Ceiling to Ceiling Curve Jointer (S)
Colour	Black	Black
Product Code	LDA-10-CTHJ-5	LDA-10-CTCTCJ-5
Dimension (mm)	53x52x21	D600x21
Housing Material	Aluminium	Aluminium

Conduction Module





Product Type	Straight Conduction Module	Corner Conduction Module
Colour	Black	Black
Product Code	LDA-10-SCM-5	LDA-10-CCM-5
Dimension (mm)	103x17x5	251x17x5
Housing Material	PC	PC

5mm Magnetic Track Lights Module

A range of modular light units for flexible and precise illumination









Product Type	Track Light		Lazer Light	Linear Light
Wattage	5W	7W	7W	7W
Product Colour	Black	Black	Black	Black
Product Code	LDA-10-5WT-5	LDA-10-7WT-5	LDA-10-7WLZ-5	LDA-10-7WLN-5
Colour Temperature	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Tunable and Dimmable 2700K - 6500K Warm|Natural|Cool	Natural White | 4000K Warm White | 3000K	Natural White | 4000K Warm White | 3000K
CRI	>90	>90	>90	>90
Operating Voltage	48V DC	48V DC	48V DC	48V DC
Dimension (mm)	32x58	39x80	201x11x17	201x11x17
Housing Material	Aluminium	Aluminium	Aluminium & PC	Aluminium & PC
Standard Packaging	50 Units	50 Units	50 Units	50 Units

LEDURE

SMARTIFY
SERIES

Engineered daylight. Designed for modern spaces.

App Controlled

Remote Operated

Voice Controlled

Dimmable & Tunable

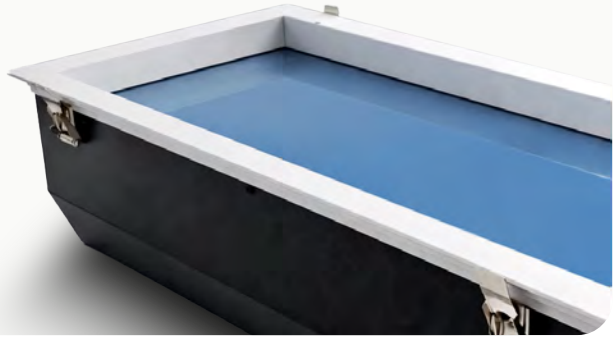
SMARTIFY

RAYLIGHT
SKY PANEL LIGHT

Diffuse, sky-like illumination for a natural ambience.

IDEAL FOR

Living Room | Bedrooms | Lounge Areas



SMARTIFY

AIR COB
PRECISION SPOT LIGHT

Focused, high-contrast lighting that highlights what matters.

IDEAL FOR

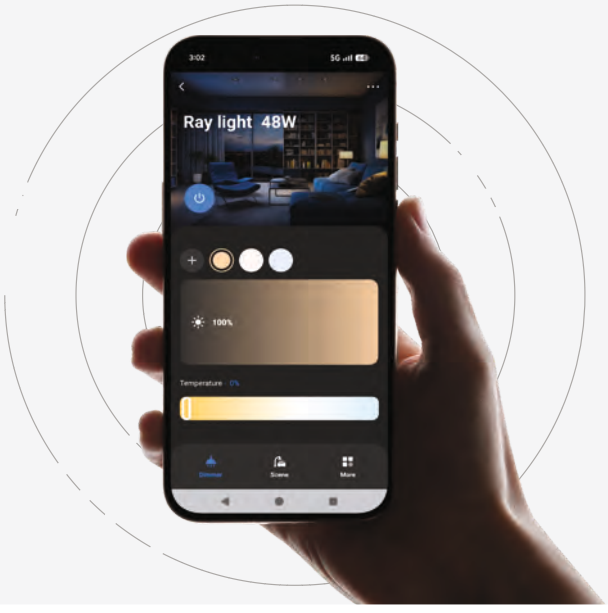
Living Room | Art Frame | Retail



SMARTLIFE APP CONTROL

Your light. Your rules.

On/Off | Dimming & Brightness | Color Temperature | Voice Control



DOWNLOAD SMART LIFE

Scan to Download the App

Available on

LEDURE

SMART GATEWAY

Your Lighting Brain



App Control
Control anytime, anywhere

BLE Mesh
Stable Connection for all devices.

Voice Assistant
Hands free control with your voice

WIFI Sync
Seamless setup and synchronization.

REMOTE CONTROL

Simple Control.
Always at hand.

- On/Off
- Dimming & Brightness
- Color Temperature

The included RF remote lets you control every aspect of your Raylight & Air COB without needing a smartphone or internet connection.



RF 2.4GHz

Range 15-20 Mtrs

LEDURE
Beyond Innovation

SMARTIFY RAYLIGHT DOWNLIGHT Series



Your Ceiling, Now Limitless

Ledure Raylight Smart Downlight Series features a sleek architectural design with a premium finish, offering a modern lighting solution. It delivers adjustable illumination with smart control, ideal for dynamic spaces. Its refined profile and advanced performance enhance interiors with a seamless lighting experience. Designed for versatility, it suits residential, retail, and commercial environments with consistent, glare-controlled illumination.



Aluminium Housing

Source Lumens 160 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 110-300V AC

bridgelux LED


CRI >90

RAYLIGHT SMART DOWNLIGHT (FRONT COLOR - WHITE)











FEATURES

- Aesthetically Appealing
- Focused Halogen Effect
- Modern and Stylish Build
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	48W	96W
Front Color	White	White
Product Code	LD-189-48W	LD-189-96W
Type	Dimmable + Tunable	Dimmable + Tunable
Color Temperature	Cool White + Natural White + Warm White	Cool White + Natural White + Warm White
CCT (K)	6500K + 4000K + 3000K	6500K + 4000K + 3000K
Source Lumens (lm/w)	160	160
Standard Packing	1 Unit	1 Unit
Beam Angle	40°	40°
Power Factor	≥0.90	≥0.90
Cutout Dimensions (mm)	285x585	285x1185
Outer Dimensions (mm)	300x600	300x1200
Technical Drawing		

LEDURE
Beyond Innovation

SMARTIFY AIR COB Series





Intelligent Lighting, Seamlessly Controlled

Smart Light. Smarter Living. Meet the Ledure Smartify Air COB Series, where contemporary design meets next-gen lighting intelligence. Dual Wi-Fi and Bluetooth connectivity puts full control in your hands via the Smart Life - Smart Living app, letting you fine-tune color and brightness to match any mood or setting. Choose from three light color options that recreate the warm charm of halogen. From cozy homes to high-end retail and dynamic commercial spaces, this is lighting that adapts to you.

- Aluminium Housing
- Source Lumens 145 lm/w
- Input 240V AC
- Surge Protection Upto 4KV
- Operating Voltage 110-300V AC
- bridgelux COB
- CRI >90

SMARTIFY AIR COB (FRONT COLOR - WHITE & BLACK)












FEATURES

- Elegant Design
- Focused Halogen Effect
- Advanced COB Technology
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	12W
Front Color	White & Black
Product Code	LDA-017-12W
Type	Dimmable + Tunable
Color Temperature	Cool White + Natural White + Warm White
CCT (K)	6500K + 4000K + 3000K
Source Lumens (lm/w)	145
Output Lumens (lm)	1320 - 1200
Standard Packing	12 Units
Beam Angle	36°
Power Factor	≥0.60
Cutout Dimensions (mm)	Ø73
Outer Dimensions (mm)	Ø85x76
Technical Drawing	



SMART

AIR COB

PRECISION SPOT LIGHT

Focused, high contrast lighting that highlights what matters.

IDEAL FOR

Living Room | Art Frame | Retail



SMART

GRACE COB

PRECISION LIGHTING

Delivers efficient illumination and ideal for contemporary spaces.

IDEAL FOR

Residential | Art Frame | Commercial



SMART

AIR DOWNLIGHT

LIGHT WITH IMPACT

Contemporary lighting with pure visual comfort.

IDEAL FOR

Residential | Art Frame | Commercial



REMOTE CONTROL

Simple Control.
Always at hand.

LEDURE

- On/Off
- Dimming & Brightness
- Color Temperature
- RD 2.4 GHz
- Range 15-20 Mtrs

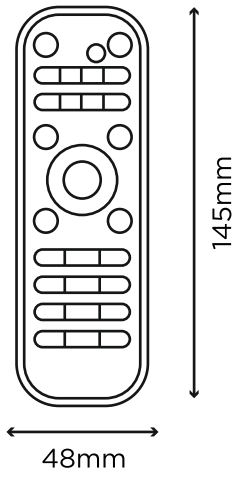


The included RF remote lets you control every aspect of your Raylight without needing a smartphone or internet connection.

TECHNICAL DETAILS (REMOTE)

Body Color	White
Product Code	LDA-R-1
Type	AAA Battery
Standard Packing	12 Units
Outer Dimensions (mm)	48x21x145

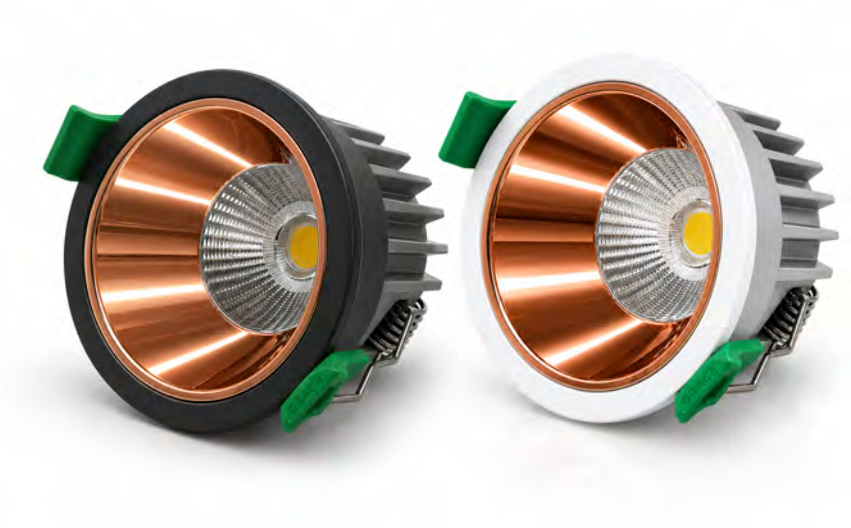
Technical Drawing



- Perfect for elders & kids
- One-click scene switching
- Works without Internet
- Long lasting battery

LEDURE
Beyond Innovation

SMART GRACE COB Series



Smart Lighting, Effortlessly Controlled

The Ledure Smart Grace COB Series is where style meets simplicity. Choose from four sophisticated finishes: Chrome, Golden, Rose Gold, and Gun Metal - to complement any interior palette. With smart dimming and three color light options all managed through a simple remote, setting the perfect ambience has never been easier. Its warm halogen effect adds depth and character to residential, retail, hospitality, and commercial spaces alike, making every room feel intentionally lit.



Aluminium Housing

Source Lumens 145 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 110-300V AC


bridgelux.COB

CRI >90

SMART GRACE COB (FRONT COLOR - CHROME, GOLDEN, ROSEGOLD & GUNMETAL)











FEATURES

Elegant Design


Focused Halogen Effect


Advanced COB Technology

Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	6W
Front Color	White & Black
Product Code	LDA-025DT-6W
Type	Dimmable + Tunable
Color Temperature	Cool White + Natural White + Warm White
CCT (K)	6500K + 4000K + 3000K
Source Lumens (lm/w)	145
Output Lumens (lm)	660 - 600
Standard Packing	24 Units
Beam Angle	42°
Power Factor	≥0.60
Cutout Dimensions (mm)	Ø59
Outer Dimensions (mm)	Ø70x60
Technical Drawing	

Wattage	12W
Front Color	White & Black
Product Code	LDA-025DT-12W
Type	Dimmable + Tunable
Color Temperature	Cool White + Natural White + Warm White
CCT (K)	6500K + 4000K + 3000K
Source Lumens (lm/w)	145
Output Lumens (lm)	1320 - 1200
Standard Packing	12 Units
Beam Angle	30°
Power Factor	≥0.60
Cutout Dimensions (mm)	Ø75
Outer Dimensions (mm)	Ø84x74
Technical Drawing	

LEDURE
Beyond Innovation

SMART AIR COB Series



Smart Illumination, Styled Your Way

Your Space. Your Light. Your Control. The Ledure Smart Air COB Series puts the power of perfect lighting right in your hands. With a sleek modern design and effortless remote control, dimming and adjusting your ambience is as easy as a click. Its focused halogen-effect beam cuts through a space with precision — creating a warm, defined glow that feels both intentional and inviting. Whether it's a cozy home, a curated retail display, or a polished commercial setting, the Smart Air COB delivers a lighting experience that's clean, characterful, and completely yours.



Aluminium Housing

Source Lumens 145 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 110-300V AC

bridgelux.COB

CRI >90

SMART AIR COB (FRONT COLOR - WHITE & BLACK)











FEATURES

Elegant Design



Focused Halogen Effect



Advanced COB Technology

Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	6W	9W
Front Color	White & Black	White & Black
Product Code	LDA-26DT-6W	LDA-26DT-9W
Type	Dimmable + Tunable	Dimmable + Tunable
Color Temperature	Cool White + Natural White + Warm White	Cool White + Natural White + Warm White
CCT (K)	6500K + 4000K + 3000K	6500K + 4000K + 3000K
Source Lumens (lm/w)	145	145
Output Lumens (lm)	660 - 600	990 - 900
Standard Packing	24 Units	12 Units
Beam Angle	42°	38°
Power Factor	≥0.60	≥0.60
Cutout Dimensions (mm)	Ø56	Ø56
Outer Dimensions (mm)	Ø64x59	Ø64x59
Technical Drawing		

Wattage	12W	20W
Front Color	White & Black	White & Black
Product Code	LDA-26DT-12W	LDA-26DT-20W
Type	Dimmable + Tunable	Dimmable + Tunable
Color Temperature	Cool White + Natural White + Warm White	Cool White + Natural White + Warm White
CCT (K)	6500K + 4000K + 3000K	6500K + 4000K + 3000K
Source Lumens (lm/w)	145	145
Output Lumens (lm)	1320 - 1200	2200 - 2000
Standard Packing	12 Units	12 Units
Beam Angle	24°	30°
Power Factor	≥0.60	≥0.60
Cutout Dimensions (mm)	Ø73	Ø80
Outer Dimensions (mm)	Ø85x76	Ø92x85
Technical Drawing		

LEDURE
Beyond Innovation

SMART AIR DOWNLIGHT Series



Soft Light. Bold Comfort.

Ledure Smart Air Downlight Series is engineered to transform how a space feels, not just how it looks. Its glare-free technology bathes interiors in smooth, balanced light that's gentle on the eyes and easy on the mind. Remote-controlled dimming lets you dial in the perfect atmosphere effortlessly, while its precisely diffused beam maintains impressive brightness without the harshness. Sleek, refined, and built for the long haul — it's the kind of lighting that makes residential, retail, and commercial spaces feel thoughtfully designed from the moment you walk in.



Aluminium Housing

Source Lumens 145 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 110-300V AC

bridgelux.LED

CRI >80

SMART AIR DOWNLIGHT (FRONT COLOR - WHITE)











FEATURES

- Aesthetically Appealing
- Advanced COB Technology
- Recessed Mount

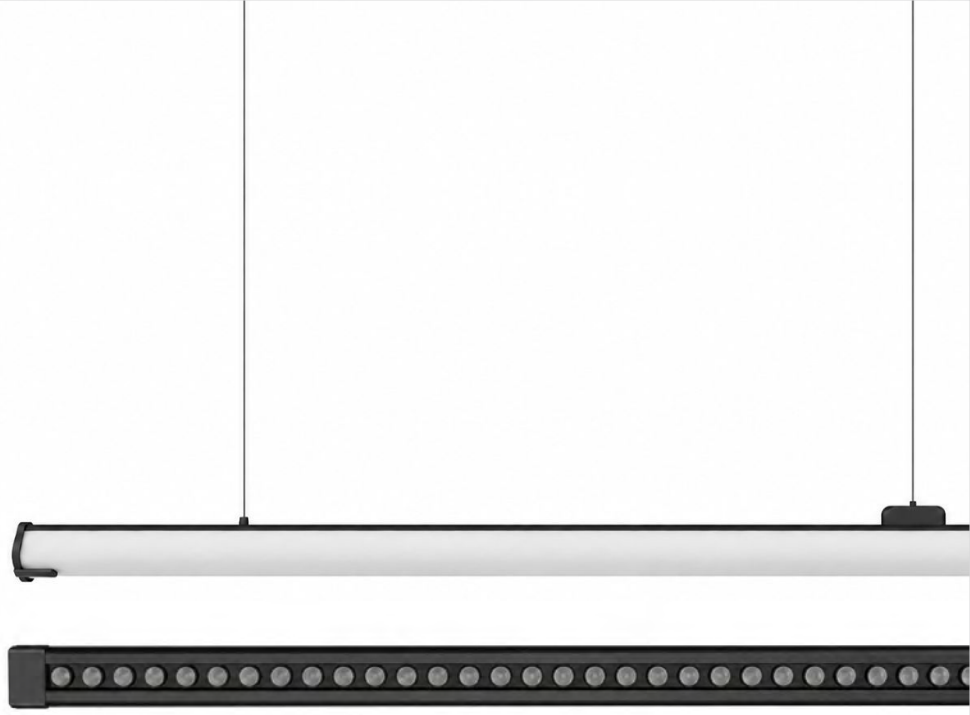
LEDURE
Beyond Innovation

Technical Details

Wattage	12W	18W
Front Color	White	White
Product Code	LDA-023DT-12W	LDA-023DT-18W
Type	Dimmable + Tunable	Dimmable + Tunable
Color Temperature	Cool White + Natural White + Warm White	Cool White + Natural White + Warm White
CCT (K)	6500K + 4000K + 3000K	6500K + 4000K + 3000K
Source Lumens (lm/w)	145	145
Output Lumens (lm)	1300 - 1100	1900 - 1700
Standard Packing	12 Units	12 Units
Beam Angle	72°	97°
Power Factor	≥0.60	≥0.60
Cutout Dimensions (mm)	Ø112	Ø145
Outer Dimensions (mm)	Ø119x52	Ø152x55
Technical Drawing		

LEDURE
Beyond Innovation

AERO LINEAR LIGHT Series



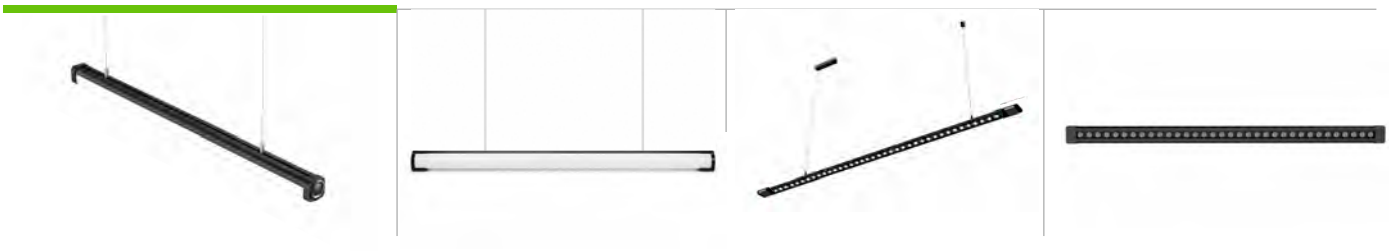
Architectural Brilliance in Every Beam

Ledure Aero Linear Light Series 3-in-1 features a sleek architectural design with a premium finish, offering a clean and contemporary look. It delivers uniform illumination with selectable CCT, ideal for modern spaces. Its elegant profile and advanced performance create a balance of style and functionality, enhancing interiors with a refined lighting experience. Designed for versatility, it suits residential, retail, and commercial environments with consistent, glare-controlled illumination.



- Aluminium Housing
- Source Lumens 135 lm/w
- Input 240V AC
- Surge Protection Upto 2KV
- Operating Voltage 110-300V AC
- bridgelux LED
- CRI >80

AERO LINEAR LIGHT

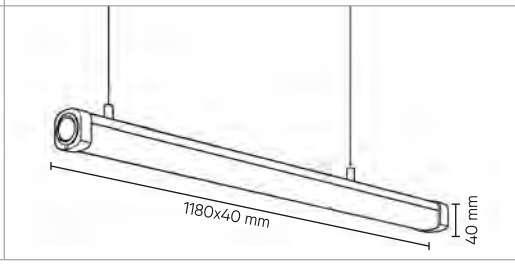
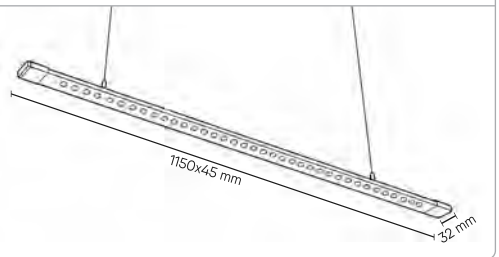


FEATURES

- Aesthetically Appealing
- In-built Color Changing Switch
- Advanced LED Technology
- Hanging Light

LEDURE
Beyond Innovation

Technical Details

Wattage	40W	40W
Body Color	Black	
Product Code	LDA-11-40WR	LDA-11-40WL
Type	Tunable	Tunable
Color Temperature	Cool White + Natural White + Warm White	Cool White + Natural White + Warm White
CCT (K)	6500K + 4000K + 3000K	6500K + 4000K + 3000K
Source Lumens (lm/w)	145	145
Output Lumens (lm)	4400 - 4000	3600 - 3250
Standard Packing	20 Units	20 Units
Beam Angle	145°	145°
Power Factor	≥0.95	≥0.95
Outer Dimensions (mm)	1180x40x40	1150x45x32
Technical Drawing		

LEDURE
Beyond Innovation

COB STRIPLIGHT Series



Create Magic with Brilliant Strip Lights

Ledure COB Striplights deliver seamless, high-intensity illumination with a uniform, dot-free lighting effect. Designed to elevate modern interiors, they highlight architectural details, coves, and ambient spaces with precision. Engineered for efficiency and flexibility, they ensure easy installation and long-lasting performance. Create magic with brilliant strip lighting that transforms every space into a refined and visually striking environment.



Technical Details

Wattage (per metre)	14W						
LEDs (per metre)	480 Chips						
Product Code	LD-220-C24-480-8						
Compatible Driver	24V DC, 2.5A/5A						
Color Temperature	Cool White	Natural White	Warm White	Pink	Red	Blue	Green
CCT (K)	6500K	4000K	3000K	-	-	-	-
Source Lumens (lm/w)	140	135	130	-	-	-	-
Output Lumens (lm/m)	1530	1475	1400	-	-	-	-
Standard Packing	50 Units			50 Units			
PCB Width (mm)	8						
Roll Size (metre)	10						
Cut mark (mm)	50						

LEDURE
Beyond Innovation

SMPS DRIVER Series



Where Power Meets Efficiency

Ledure SMPS Drivers deliver stable and efficient power output, ensuring consistent performance across lighting applications. Engineered with advanced circuitry, they provide high efficiency, low heat generation, and reliable voltage regulation. Designed for durability and safety, they support long operational life even under demanding conditions. Where power meets efficiency, Ledure SMPS Drivers enable seamless and dependable lighting performance.

- Input 240V AC
- Surge Protection Upto 3.5KV
- Output Voltage 24V DC
- Open Circuit + Reverse Polarity

Technical Details

Wattage (per metre)	60W	120W
Product Code	24V, 2.5AMP	24V, 5AMP
Current	2.5Amp	5Amp
Voltage	24V	24V
Type	Constant Voltage	Constant Voltage
Power Factor	>0.95	>0.95
Standard Packing	60 Units	30 Units

LEDURE
Beyond Innovation

ARCADE
COB Series





FEATURES

- Aesthetically Appealing
- Adjustable Focus Capabilities
- Easy Pull & Push Adjustments
- Advanced COB Technology
- Pullable & Rotatable Recessed Light

LEDURE
Beyond Innovation

Illuminate with Precision

Ledure Arcade COB series, featuring sleek, pull-out lights with easy adjustments and adjustable focus. These energy-efficient, recessed lights offer true color effects and a long lifespan, making them perfect for any space. Their rotatable design ensures versatile illumination with stylish and practical appeal.

ARCADE COB (BODY COLOR - WHITE & BLACK)










Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 4KV




Operating Voltage 120-290V AC




bridgelux.COB

CRI >90

LEDURE
Beyond Innovation




Technical Details

Wattage	12W			18W			24W		
Body Color	White, Black								
Product Code	LDA-001-12WR			LDA-001-18WR			LDA-001-24WR		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125	135	130	125
Output Lumens (lm)	1200	1140	1080	1800	1700	1620	2400	2280	2160
Standard Packing	12 Units			12 Units			12 Units		
Beam Angle	24°, 36°								
Power Factor	≥0.95								
Cutout Dimensions (mm)	Ø80			Ø99			Ø124		
Outer Dimensions (mm)	Ø90x97			Ø110x119			Ø135x144		
Technical Drawing									

Wattage	12W			18W			24W		
Body Color	White, Black								
Item Code (White color)	LDA-001-12WS			LDA-001-18WS			LDA-001-24WS		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125	135	130	125
Output Lumens (lm)	1200	1140	1080	1800	1700	1620	2400	2280	2160
Standard Packing	12 Units			12 Units			12 Units		
Beam Angle	24°, 36°								
Power Factor	≥0.95								
Cutout Dimensions (mm)	78x78			105x105			126x126		
Outer Dimensions (mm)	90x90x97			115x115x116			140x140x144		
Technical Drawing									

LEDURE
Beyond Innovation

Technical Details

Wattage	24W			36W			48W		
Body Color	White, Black								
Product Code	LDA-001-24W2S			LDA-001-36W2S			LDA-001-48W2S		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125	135	130	125
Output Lumens (lm)	2400	2280	2160	3600	3420	3250	4800	4560	4330
Standard Packing	12 Units			12 Units			8 Units		
Beam Angle	24°, 36°								
Power Factor	≥0.95								
Cutout Dimensions (mm)	158x78			186x101			230x126		
Outer Dimensions (mm)	168x88x98			210x115x132			255x140x145		
Technical Drawing									

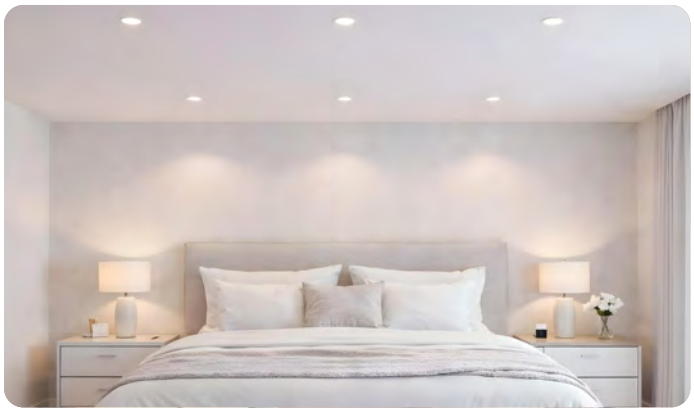
LEDURE
Beyond Innovation

JADE COB Series



Highlighting Spaces with Perfection

Ledure Jade COB Series redefines what a ceiling light can look like by making itself disappear. Its groundbreaking rimless installation conceals the front ring entirely within the ceiling, leaving behind nothing but a seamless, trimless finish that feels like light simply emerging from the architecture itself. No frames, no distractions — just pure, sophisticated illumination that elevates the aesthetic of any space it touches. For those who believe the best design is the kind you don't notice, the Jade COB is the only choice.



Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 120-290V AC

bridgelux.COB

CRI >90

JADE COB (FRONT COLOR - WHITE, SILVER & BLACK)









FEATURES

- Aesthetically Appealing
- Focused Halogen Effect
- Advanced COB Technology
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	7W			12W		
Front Color	White, Silver, Black					
Product Code	LDA-014-7W			LDA-014-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	700	665	630	1320	1140	1080
Standard Packing	24 Units			12 Units		
Beam Angle	32°			42°		
Power Factor	≥0.50			≥0.95		
Cutout Dimensions (mm)	Ø53			Ø73		
Outer Dimensions (mm)	Ø86x76			Ø105x81		
Technical Drawing						

LEDURE
Beyond Innovation

DIVINE COB Series



Light That Truly Does Justice to Your Space

Some lights illuminate. The Ledure Divine COB Series transforms. With premium craftsmanship and true color rendering at its core, it reveals the full depth and richness of every interior it touches, making colors pop, textures sing, and spaces feel alive. Its contemporary recessed design adds a quiet sophistication to any ceiling, while focused brightness and lasting reliability ensure it performs as flawlessly as it looks. Whether it's a curated home, a bustling office, or a polished retail floor, Divine COB doesn't just light the space. It defines it.



Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 120-290V AC

bridgelux.COB

CRI >90

DIVINE COB (FRONT COLOR - BRONZE, STEEL, BLACK & WHITE)












FEATURES

- Aesthetically Appealing
- Focused Halogen Effect
- Advanced COB Technology
- Recessed Mount

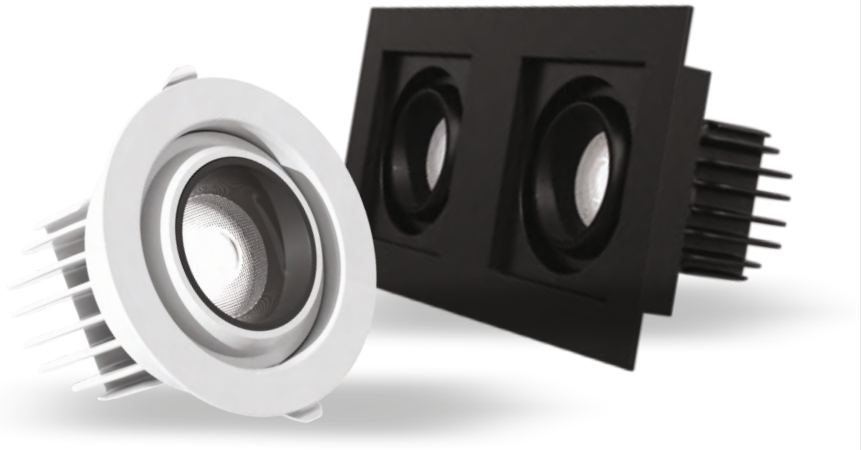
LEDURE
Beyond Innovation

Technical Details

Wattage	6W			12W			18W		
Front Color	Bronze, Steel, Black, White								
Product Code	LDA-012-6W			LDA-012-12W			LDA-012-18W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125	135	130	125
Output Lumens (lm)	600	570	540	1200	1140	1080	1800	1710	1620
Standard Packing	24 Units			12 Units			12 Units		
Beam Angle	30°			32°			32°		
Power Factor	≥0.50			≥0.95			≥0.95		
Cutout Dimensions (mm)	Ø56			Ø71			Ø85		
Outer Dimensions (mm)	Ø63x46			Ø79x48			Ø94x52		
Technical Drawing									

LEDURE
Beyond Innovation

SAGA
COB Series





FEATURES

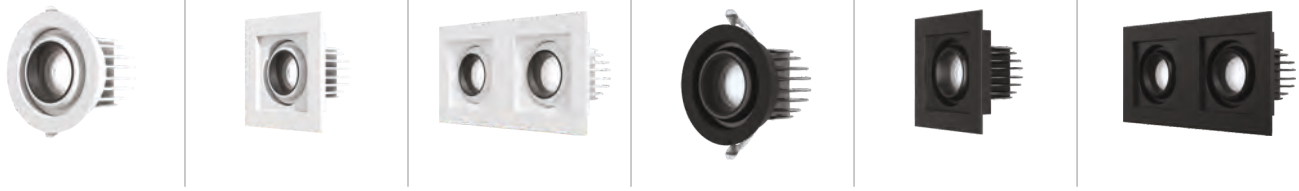
- Aesthetically Appealing
- Adjustable Focus Capabilities
- Modern and Stylish Build
- Advanced COB Technology
- Tiltable Recessed Light

LEDURE
Beyond Innovation

Versatile Illumination, Tailored to Perfection

Ledure Saga COB Series offers round, square, and rectangular shapes with single and dual lens options. Available in 24° and 36° beam angles, this tiltable recessed light features cutting-edge COB technology and adjustable focus capabilities, perfect for homes, offices, and commercial spaces needing versatile, precise illumination.

SAGA COB (BODY COLOR - WHITE & BLACK)





Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 4KV




Operating Voltage 120-300V AC




bridgelux.COB

CRI >90

LEDURE
Beyond Innovation




Technical Details

Wattage	15W			24W			40W		
Body Color	White, Black								
Product Code	LDA-003-15WR			LDA-003-24WR			LDA-003-40WR		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125	135	130	125
Output Lumens (lm)	1500	1420	1350	2400	2280	2160	4000	3800	3610
Standard Packing	12 Units			12 Units			12 Units		
Beam Angle	24°, 36°								
Power Factor	≥0.95								
Cutout Dimensions (mm)	Ø80			Ø100			Ø124		
Outer Dimensions (mm)	Ø90x75			Ø110x95			Ø135x118		
Technical Drawing									

Wattage	15W			24W			40W		
Body Color	White, Black								
Item Code (White color)	LDA-003-15WS			LDA-003-24WS			LDA-003-40WS		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125	135	130	125
Output Lumens (lm)	1500	1420	1350	2400	2280	2160	4000	3800	3610
Standard Packing	12 Units			12 Units			12 Units		
Beam Angle	24°, 36°								
Power Factor	≥0.95								
Cutout Dimensions (mm)	80x80			101x101			126x126		
Outer Dimensions (mm)	88x88x75			115x115x92			140x140x118		
Technical Drawing									

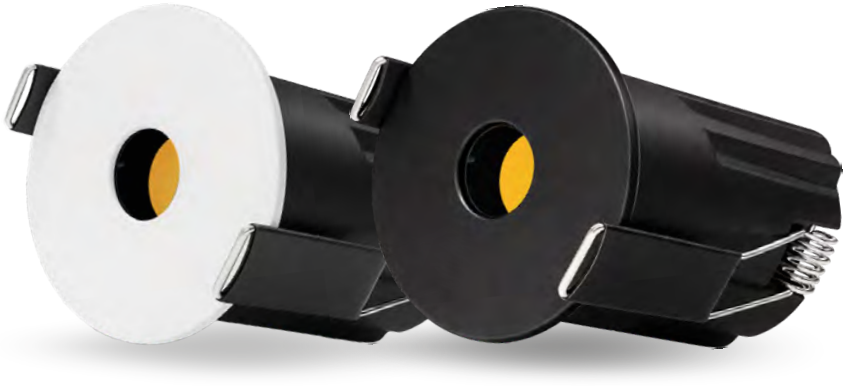
LEDURE
Beyond Innovation

Technical Details

Wattage	30W			48W			80W		
Body Color	White, Black								
Product Code	LDA-003-30W2S			LDA-003-48W2S			LDA-003-80W2S		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125	135	130	125
Output Lumens (lm)	3000	2860	2700	4800	4560	4330	8000	7600	7220
Standard Packing	12 Units			12 Units			8 Units		
Beam Angle	24°, 36°								
Power Factor	≥0.95								
Cutout Dimensions (mm)	156x78			186x101			228x120		
Outer Dimensions (mm)	168x88x75			210x115x92			255x140x118		
Technical Drawing									

LEDURE
Beyond Innovation

OLIVE COB Series



Elegance in Every Focused Beam

Ledure Olive COB features an architectural build with a premium finish, giving it a refined and sophisticated look. It delivers a sharp, focused beam for precise illumination, ideal for modern spaces. Its elegant design and superior lighting performance make it a perfect blend of style and functionality, enhancing interiors with a modern and professional lighting experience. Designed for versatility, it complements residential, retail, and commercial environments with consistent and glare-controlled illumination.



Aluminium Housing

Source Lumens 110 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 120-290V AC

bridgelux.COB

CRI >80

OLIVE COB (FRONT COLOR - BLACK & WHITE)









FEATURES

Aesthetically Appealing



Focused Halogen Effect

Advanced COB Technology

Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	7W			12W		
Front Color	Black & White					
Product Code	LDA-015-7W			LDA-015-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	110	105	100	110	105	100
Output Lumens (lm)	200	195	190	550	520	500
Standard Packing	12 Units			12 Units		
Beam Angle	24°			24°		
Power Factor	≥0.50			≥0.95		
Cutout Dimensions (mm)	Ø43			Ø54		
Outer Dimensions (mm)	Ø56x63			Ø65x75		
Technical Drawing						

LEDURE
Beyond Innovation

BOOST COB Series



Built to Boost. Designed to Impress.

Ledure Boost COB isn't just a light, it's a statement. Precision-engineered for bright, focused illumination, it combines a refined architectural finish with performance that speaks for itself. Its elegant build integrates seamlessly into any interior, adding a layer of sophistication that elevates the entire space. From the warm comfort of a home to the polished energy of retail, hospitality, and commercial environments, Boost COB delivers clarity, comfort, and a quietly confident aura that makes every room feel exactly right.



Aluminium Housing

Source Lumens 140 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 120-290V AC

bridgelux.COB

CRI >80

BOOST COB (FRONT COLOR - WHITE)









FEATURES

- Aesthetically Appealing
- Focused Halogen Effect
- Advanced COB Technology
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	6W			12W		
Front Color	White					
Product Code	LDA-020-6W			LDA-020-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	660	630	600	1320	1250	1200
Standard Packing	24 Units			12 Units		
Beam Angle	32°			32°		
Power Factor	≥0.60			≥0.95		
Cutout Dimensions (mm)	Ø53			Ø64		
Outer Dimensions (mm)	Ø60x80			Ø70x93		
Technical Drawing						

LEDURE
Beyond Innovation

DYNAMO
COB Series



Dynamo by Name. Dynamic by Nature.

Ledure Dynamo COB brings serious energy to every space it enters. Built with a bold architectural frame and a premium finish that commands attention, it channels that same intensity into a powerful, focused beam that lights up interiors with precision and purpose. Sleek enough for a luxury residence, strong enough for a high-traffic retail or commercial environment, the Dynamo COB strikes the perfect balance between striking design and unstoppable performance. This isn't just illumination. It's a statement.



Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 120-290V AC

bridgelux.COB

CRI >80

DYNAMO COB (FRONT COLOR - BLACK & WHITE)









FEATURES

Aesthetically Appealing



Focused Halogen Effect

Advanced COB Technology

Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	6W			12W		
Front Color	Black & White					
Product Code	LDA-021-6W			LDA-021-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	660	630	600	1320	1260	1200
Standard Packing	24 Units			12 Units		
Beam Angle	50°			42°		
Power Factor	≥0.50			≥0.95		
Cutout Dimensions (mm)	Ø34			Ø52		
Outer Dimensions (mm)	Ø40x62			Ø58x85		
Technical Drawing						

LEDURE
Beyond Innovation

CASA
COB Series





Lighting Luxury, Everyday

Ledure Casa COB Series brings the warmth and elegance of luxury lighting into everyday living spaces. Thoughtfully designed for homes and residential interiors, it creates a soft, inviting ambiance that transforms any room into a sanctuary of comfort and style. With consistent, flicker-free illumination and a refined finish, Casa blends seamlessly into modern and classic décor alike - because in every home, beautiful lighting shouldn't be a luxury, it should be a way of life.

Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 120-290V AC

bridgelux COB

CRI >90

CASA COB (FRONT COLOR - Gun Metal)










FEATURES

- Aesthetically Appealing
- Focused Halogen Effect
- Advanced COB Technology
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	6W			12W		
Front Color	Gun Metal					
Product Code	LDA-010-6W			LDA-010-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	600	570	540	1240	1180	1080
Standard Packing	24 Units			12 Units		
Beam Angle	32°			32°		
Power Factor	≥0.50			≥0.95		
Cutout Dimensions (mm)	Ø54			Ø64		
Outer Dimensions (mm)	Ø62x79			Ø72x79		
Technical Drawing						

Wattage	18W		
Front Color	Gun Metal		
Product Code	LDA-010-18W		
Color Temperature	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125
Output Lumens (lm)	1800	1710	1620
Standard Packing	12 Units		
Beam Angle	32°		
Power Factor	≥0.95		
Cutout Dimensions (mm)	Ø74		
Outer Dimensions (mm)	Ø82x79		
Technical Drawing			

LEDURE
Beyond Innovation

ZOOM PLUS COB Series



Precision Lighting, Perfectly Directed

The Zoom Plus COB Series is engineered for pinpoint accuracy, delivering a focused, high-intensity beam exactly where you need it. Built with premium COB technology, it offers superior lumen output, tight beam control, and exceptional color rendering - making it ideal for retail displays, galleries, and architectural accent lighting. With a robust design built for long operational life, the Zoom Plus brings precision and power together in every installation.



- Aluminium Housing
- Source Lumens 135 lm/w
- Input 240V AC
- Surge Protection Upto 4KV
- Operating Voltage 120-290V AC
- bridgelux.COB
- CRI >90

ZOOM PLUS COB (FRONT COLOR - WHITE)











FEATURES

- Elegant Design
- Focused Halogen Effect
- Advanced COB Technology
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

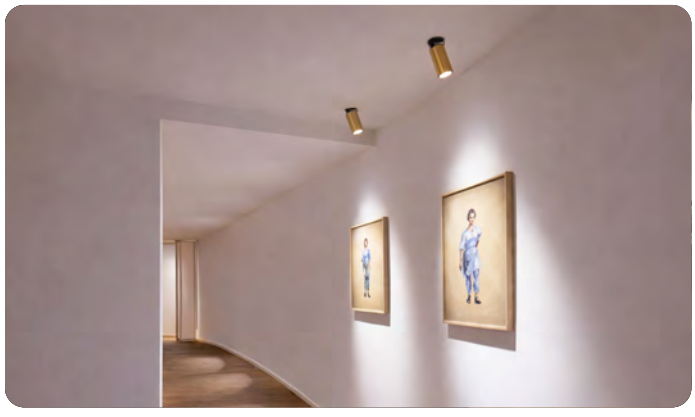
Wattage	12W			18W		
Body Color	White					
Product Code	LDA-006-12W			LDA-006-18W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	1200	1140	1080	1800	1700	1620
Standard Packing	12 Units			12 Units		
Beam Angle	36°			36°		
Power Factor	≥0.95			≥0.95		
Cutout Dimensions (mm)	Ø78			Ø95		
Outer Dimensions (mm)	Ø88x75			Ø110x92		
Technical Drawing						

Wattage	24W			36W		
Body Color	White					
Product Code	LDA-006-24W			LDA-006-36W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	2400	2280	2160	3600	3420	3240
Standard Packing	12 Units			8 Units		
Beam Angle	36°			36°		
Power Factor	≥0.95			≥0.95		
Cutout Dimensions (mm)	Ø115			Ø145		
Outer Dimensions (mm)	Ø135x112			Ø165x168		
Technical Drawing						

LEDURE
Beyond Innovation

DIVINE SPOT COB Series





Every Spot, A Signature of Style

The Divine Spot COB Series combines elegant aesthetics with powerful spot lighting performance. Designed to make every highlighted space feel curated and intentional, it delivers warm, rich illumination that enhances textures, surfaces, and focal points with a designer's touch. Whether used in hospitality, luxury retail, or premium interiors, the Divine Spot turns ordinary spaces into beautifully lit experiences — where style and substance shine as one.

- Aluminium Housing
- Source Lumens 135 lm/w
- Input 240V AC
- Surge Protection Upto 4KV
- Operating Voltage 110-300V AC
- bridgelux.COB
- CRI >90

DIVINE SPOT COB (BODY COLOR - BLACK, WHITE, BRASS BROWN & BRASS GREY)





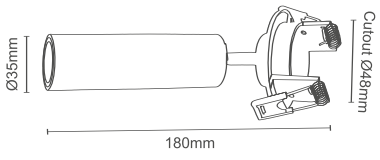


FEATURES

- Elegant Design
- Focused Halogen Effect
- Advanced COB Technology
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	7W		
Body Color	Black, White, Brass Brown & Brass Grey		
Product Code	LDA-018-7W		
Color Temperature	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125
Output Lumens (lm)	500	470	450
Standard Packing	12 Units		
Beam Angle	24°		
Power Factor	≥0.95		
Cutout Dimensions (mm)	Ø48		
Outer Dimensions (mm)	Ø35x180		
Technical Drawing			

LEDURE
Beyond Innovation

LAZER LINE DOWNLIGHT Series



Sharp Lines. Sharper Light.

Ledure Lazer Line Downlight Series turns an often-overlooked surface into a work of architectural art. Its minimal design and premium aluminium housing sit flush and seamless within any ceiling: clean, sharp, and effortlessly sophisticated. No clutter, no bulk; just a sleek recessed profile that adds elegant visual depth to every space it inhabits. From curated residential interiors to upscale retail, hospitality, and commercial environments, the Lazer Line Series doesn't just light the room. It completes it.



Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 3.5KV

Operating Voltage 110-300V AC

bridgelux.LED

CRI >90

LAZER LINE DOWNLIGHT (FRONT COLOR - WHITE & BLACK)





FEATURES

- Aesthetically Appealing
- Focused Halogen Effect
- Sleek Linear Design
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	6W			12W		
Body Color	White & Black					
Product Code	LDA-022-6W			LDA-022-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	450	425	400	900	850	815
Standard Packing	30 Units			30 Units		
Beam Angle	44°			44°		
Power Factor	>0.50			>0.50		
Cutout Dimensions (mm)	105x14x27			203x14x27		
Outer Dimensions (mm)	113x20x32			211x20x32		
Technical Drawing						

LEDURE
Beyond Innovation

SAGA DOWNLIGHT Series



Brighten Your World with Precision

Ledure Saga Downlight Series features a contemporary design that enhances any space. With a CRI over 80, colors are rendered accurately and vividly. Ideal for residential and commercial settings, these highly efficient downlights provide bright illumination while conserving energy, ensuring versatile and stylish lighting solutions.



- Aluminium Housing
- Source Lumens 165 lm/w
- Input 240V AC
- Surge Protection Upto 4KV
- Operating Voltage 110-300V AC
- bridgelux LED
- CRI >80

SAGA DOWNLIGHT (FRONT COLOR - WHITE)





FEATURES

- Modern and Stylish Build
- Compact Size High Wattage
- Recessed Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	18W			24W		
Front Color	White					
Product Code	LDA-007-18W			LDA-007-24W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	165	155	145	165	155	145
Output Lumens (lm)	1800	1710	1620	2400	2280	2160
Standard Packing	12 Units			12 Units		
Beam Angle	90°			90°		
Power Factor	≥0.95			≥0.95		
Cutout Dimensions (mm)	Ø92			Ø114		
Outer Dimensions (mm)	Ø105x45			Ø124x47		
Technical Drawing						

LEDURE
Beyond Innovation

CUBE SURFACE COB Series



Modern & Excellent Illumination

Ledure Cube Surface COB Series offers single and double LED configurations for efficient, modern illumination for any surface mount. Their sleek cube design ensures uniform lighting with true color effects, ideal for offices, retail spaces, and homes. Built with durable Bridgelux COB LEDs, enhancing any environment.



Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 120-290V AC

bridgelux COB

CRI >90

CUBE SURFACE COB (BODY COLOR - WHITE & BLACK)











FEATURES

- Cube Design for Modern Aesthetics
- Durable Build
- Advanced COB Technology
- Surface Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	12W			24W		
Body Color	Black & White					
Product Code	LDA-005-12W			LDA-005-24W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	1200	1140	1080	2400	2280	2165
Standard Packing	24 Units			12 Units		
Beam Angle	36°			36°		
Power Factor	≥0.95			≥0.95		
Outer Dimensions (mm)	114x114x55			224x114x55		
Technical Drawing						

LEDURE
Beyond Innovation

DIVINE SURFACE SPOT COB Series



Accent Lighting, Elevated to an Art Form

Ledure Divine Spot Surface COB Series proves that surface-mounted lighting can be just as stunning as what it illuminates. Choose from four distinct finishes: Black, White, Golden, and Gun Metal. Each adds its own personality to a modern ceiling while blending effortlessly into the surrounding architecture. With focused, refined illumination across versatile light color variants, it creates accent lighting that feels intentional, warm, and beautifully curated. For contemporary spaces that treat every surface as an opportunity, Divine Spot is the finishing touch that ties it all together.



- Aluminium Housing
- Source Lumens 135 lm/w
- Input 240V AC
- Surge Protection Upto 4KV
- Operating Voltage 110-300V AC
- bridgelux COB
- CRI >90

DIVINE SPOT SURFACE COB (BODY COLOR - BLACK, WHITE, BRASS BROWN & BRASS GREY)







FEATURES

- Elegant Design
- Focused Halogen Effect
- Advanced COB Technology
- Surface Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	7W		
Body Color	Black, White, Brass Brown & Brass Grey		
Product Code	LDA-019-7W		
Color Temperature	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125
Output Lumens (lm)	500	470	450
Standard Packing	12 Units		
Beam Angle	24°		
Power Factor	≥0.95		
Outer Dimensions (mm)	Ø35x180		
Technical Drawing			

LEDURE
Beyond Innovation

CASA SURFACE COB Series






Surface Mounted. Seriously Stunning.

Ledure Casa Surface COB Series makes its presence known the moment it's installed. Its striking cylindrical form in a premium Gun Metal finish brings an unmistakable edge to contemporary ceilings, commanding attention before it even switches on. Once it does, a sharp, refined beam takes over, delivering focused, high-clarity illumination that enhances every surface, texture, and detail beneath it. Surface-mounted for seamless integration and styled for maximum impact, it is the choice for residential, retail, hospitality, and commercial spaces that refuse to settle for ordinary lighting.

- Aluminium Housing
- Source Lumens 135 lm/w
- Input 240V AC
- Surge Protection Upto 4KV
- Operating Voltage 120-290V AC
- bridgelux.COB
- CRI >90

CASA SURFACE COB (FRONT COLOR - GUNMETAL)










FEATURES

- Elegant Design
- Focused Halogen Effect
- Advanced COB Technology
- Surface Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	6W			12W		
Body Color	Gun Metal					
Product Code	LDA-011-6W			LDA-011-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	540	510	480	1080	1020	960
Standard Packing	24 Units			12 Units		
Beam Angle	32°			32°		
Power Factor	≥0.95			≥0.95		
Cutout Dimensions (mm)	NA			NA		
Outer Dimensions (mm)	Ø56x70			Ø65x86		
Technical Drawing						

Wattage	18W		
Front Color	Gun Metal		
Product Code	LDA-011-18W		
Color Temperature	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125
Output Lumens (lm)	1620	1530	1440
Standard Packing	12 Units		
Beam Angle	32°		
Power Factor	≥0.95		
Cutout Dimensions (mm)	NA		
Outer Dimensions (mm)	Ø75x101		
Technical Drawing			

LEDURE
Beyond Innovation

DIVINE SURFACE COB Series



Three Finishes. One Unforgettable Impression.

Ledure Divine Surface COB Light is proof that the most powerful design choices are often the simplest ones. Available in Black, Bronze, and Silver, its premium cylindrical form brings a quiet architectural drama to any ceiling, each finish telling its own story while elevating the space around it. But it's not just about looks. Beneath that refined exterior lies powerful, warm illumination that wraps homes, retail spaces, hospitality venues, and commercial interiors in a glow that feels both luxurious and effortlessly inviting. Divine by name, divine by every definition.



Aluminium Housing

Source Lumens 135 lm/w

Input 240V AC

Surge Protection Upto 4KV

Operating Voltage 120-290V AC

bridgelux.COB

CRI >90

DIVINE SURFACE COB (FRONT COLOR - BRONZE, STEEL & BLACK)







FEATURES

Elegant Design



Focused Halogen Effect

Advanced COB Technology

Surface Mount

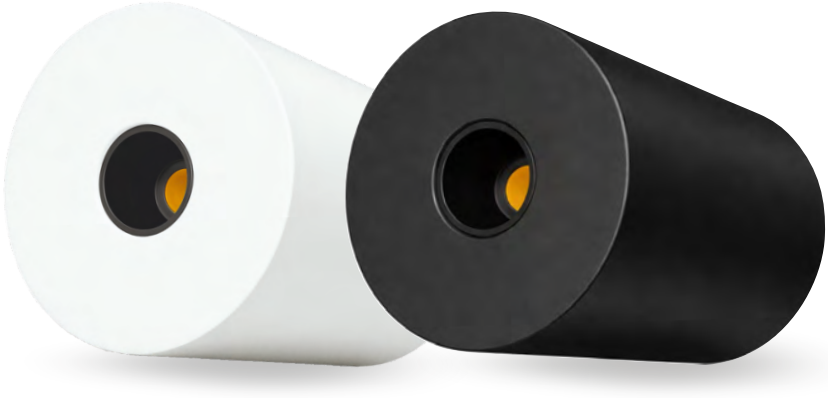
LEDURE
Beyond Innovation

Technical Details

Wattage	6W			12W		
Body Color	Bronze, Steel, Black					
Product Code	LDA-013-6W			LDA-013-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	135	130	125	135	130	125
Output Lumens (lm)	600	570	540	1200	1140	1080
Standard Packing	24 Units			12 Units		
Beam Angle	24°			48°		
Power Factor	≥0.95			≥0.95		
Outer Dimensions (mm)	Ø58x69			Ø72x78		
Technical Drawing						

LEDURE
Beyond Innovation

OLIVE SURFACE COB Series



Spotlight the Extraordinary. Every Single Day.

Ledure Olive Surface COB Light is designed for spaces that deserve to be seen at their very best. Its beautifully crafted cylindrical form makes a bold yet refined statement on any ceiling, while its sharp, precise beam cuts through a space with focused elegance; adding depth, dimension, and a touch of drama to everything it illuminates. With a premium finish and smooth, consistent lighting performance, Olive Surface COB is the kind of fixture that transforms an ordinary room into a thoughtfully curated space. Perfect for homes, retail environments, and commercial interiors that take their aesthetics seriously.



- Aluminium Housing
- Source Lumens 110 lm/w
- Input 240V AC
- Surge Protection Upto 4KV
- Operating Voltage 120-290V AC
- bridgelux.COB
- CRI >80

OLIVE SURFACE COB (FRONT COLOR - BLACK & WHITE)





FEATURES

- Elegant Design
- Focused Halogen Effect
- Advanced COB Technology
- Surface Mount

LEDURE
Beyond Innovation

Technical Details

Wattage	7W			12W		
Body Color	Black & White					
Product Code	LDA-016-7W			LDA-016-12W		
Color Temperature	Cool White	Natural White	Warm White	Cool White	Natural White	Warm White
CCT (K)	6500K	4000K	3000K	6500K	4000K	3000K
Source Lumens (lm/w)	110	105	100	110	105	100
Output Lumens (lm)	220	210	205	500	480	460
Standard Packing	12 Units			12 Units		
Beam Angle	24°			24°		
Power Factor	≥0.95			≥0.95		
Cutout Dimensions (mm)	NA			NA		
Outer Dimensions (mm)	Ø54x69			Ø74x82		
Technical Drawing						

LEDURE

Registered Office

115, 1st Floor, Devika Tower, Nehru Place,
New Delhi - 110019

Manufacturing Address

A-40, Sector-58, Noida, Gautam Buddha Nagar
Uttar Pradesh - 201301

Branch Offices

Pune • Kolkata • Patna • Jaipur
Guwahati • Lucknow • Hyderabad

Customer Care

Toll Free : 1800 11 6373
Email : info@ledure.com
Website : www.ledure.com

BEST BRANDS® 2025 | ET NOW | THE TIMES GROUP

Recognised as one of the **Best Brands 2025**
at **ET NOW** Best Brands Conclave